

SR GreenPoxy 56 / SD 7561

Transparent epoxy system
High carbon system of plant origin



SR GreenPoxy 56 resin is based on the latest innovations in green chemistry. Resin is produced with a high carbon content of plant origin.

SR GreenPoxy 56 resin represents a significant technological breakthrough on the following points: purity, color, performance and guarantees on the availability of industrial tonnages.

SR GreenPoxy 56 molecular structure is bio-based at almost 51%. This carbon content of plant origin, is certified by measurements of Carbon 14 by an independent laboratory (ASTM D6866 or XP CEN / TS 16640).

Many other hardener couplings are possible to perfectly meet your needs.

Fields of application

- Contact laminating (mold or industrial part)
- Injection
- Filament winding
- Hot or cold press
- Little casting



Epoxy resin SR GreenPoxy 56

Appearance		liquid
Color		colourless
Gardner color		≤ 2
Viscosity (mPa.s)	@ 15 °C	2875 ± 575
	@ 20 °C	1600 ± 300
	@ 25 °C	950 ± 190
	@ 30 °C	588 ± 112
Density	@ 20 °C	1,1980
Refractive index	@ 25 °C	1,5351 ± 0,002
% Bio-based Carbon content		51 ± 2
Storage (months)	@ Ta	24

Hardener(s)


		SD 7561
Appearance		liquid
Color		colourless
Gardner color		≤ 2
Reactivity level		Slow
Viscosity (mPa.s)	@ 15 °C	80 ± 15
	@ 20 °C	60 ± 15
	@ 25 °C	45 ± 10
	@ 30 °C	32 ± 6
Density	@ 20 °C	0,9710
Refractive index	@ 25 °C	1,471 ± 0,002
Storage (months)	@ Ta	24

Mixe(s) SR GreenPoxy 56 / SD 7561

		SD 7561
Appearance		liquid
Color		colourless
Mixing ratio		
	By weight	100 / 36
	By volume	100 / 45
Density	@ 20 °C	1,1702
Initial viscosity	@ 20 °C	700
PP 50 mm - 10 s-1 (mPa.s)	@ 30 °C	400

Reactivity on a 1 mm thick layer

@ 20 °C & 30 °C

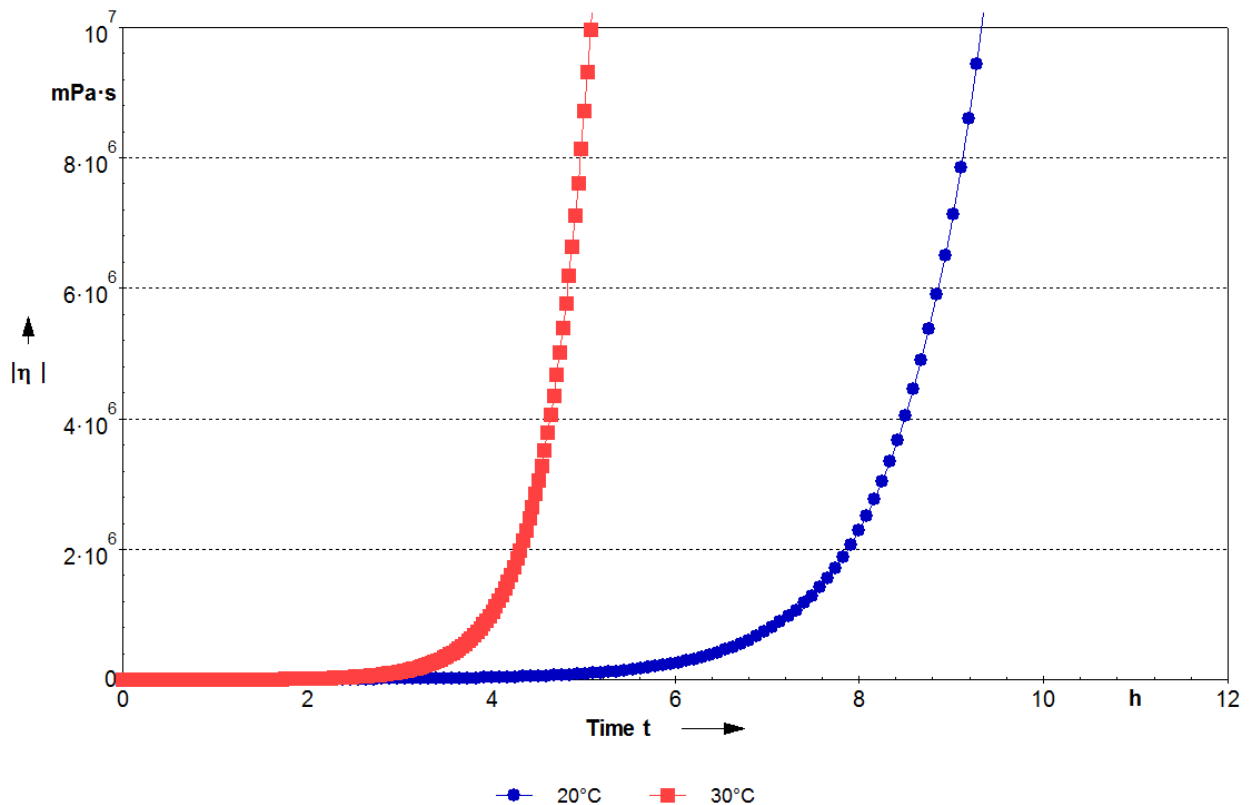

Mechanical properties on cast resin :

		SR GreenPoxy 56 / SD 7561		
Curing cycles	→	24 h @ Ta + 24 h @ 40 °C	24 h @ Ta + 16 h @ 60 °C	24 h @ Ta + 8 h @ 80 °C
Tensile				
Modulus	N/mm ²	3 290	3 160	2 980
Maximum strength	N/mm ²	71	71	68
Breaking Strength	N/mm ²	60	67	66
Elongation at max strength	%	3,6	4,3	5
Elongation at break	%	5,2	5,4	6,4
Flexion				
Modulus	N/mm ²	3 360	3 230	3 010
Maximum strength	N/mm ²	113	118	111
Breaking Strength	N/mm ²	91	101	93
Elongation at max strength	%	4,4	5,3	6
Elongation at break	%	6,5	8,1	9,8
Shear				
Breaking Strength	N/mm ²	46	53	47
Compression				
Modulus	N/mm ²			
Yield strength	N/mm ²	100	100	96
Offset compression yield	%	12,8	13,2	15,3
Charpy impact strength				
Resilience	kJ/m ²	36	32	52
DSC glass transition				
TG1 onset	°C	67	79	78
TG1 max onset	°C			85
DTMA glass transition				
TG tan delta	°C			
TeiG onset G'	°C			
TmG midpoint G'	°C			
TefG endpoint	°C			
TG peak G''	°C			

Tests carried out on samples of pure cast resin, without prior degassing, between steel plates.

Measures undertaken according to the following norms:

Mechanical tests:

Tension:	NF EN ISO 527-2:2012
Flexion:	NF EN ISO 178:2011
Compression:	NF EN ISO 604:2004 or NF EN ISO 844:2014 (foam product)
Charpy impact strength:	NF EN ISO 179-1:2010
Shear Strength:	ASTM D732-17 (Punch Tool)
Interlaminar shrinkage strength:	ASTM D5528-13
Toughness (GIC et KIC) :	ISO 13586:2000

Water absorption: Internal. Polymerization according to cycle, machining, weighing, time spent in distilled water at 70 °C / 48 hours, weighing 1 hour after emerging,

Thermal tests:

Glass transition DSC:	NF EN ISO 11357-2:2014 -5°C to 180 °C under nitrogen gas
T_{G1} or Onset:	1 st scan at 20 °C/min
T_{G1} maximum or Onset:	2nd scan at 20 °C/min

Glass transition DTMA:	Temperature ramp 0 °C to 180 °C @ 2°C/min under normal atmosphere
	NF EN ISO 11357-1:2016 T_G onset G'
	ASTM D4065-12 T_G peak G''

Physical tests:

Gardner color:	NF EN ISO 4630:2016	Visual method
Refractive index:	NF ISO 280:1999	
Viscosity:	NF EN ISO 3219:1994	Rheometer 50 mm, shear 10 s ⁻¹
Density on liquids:	ISO 2811-1:2016	Pycnometer
Density on solid:	NF EN ISO 1183-3:1999	Helium Pycnometer
Density on foam:	NF EN ISO 845:2009	
Gel time:	Cross G' G''	Rheometer CP50 - Shear rate 10 s ⁻¹
Green Carbone content:	ASTM D6866-16 or XP CEN/TS 16640 Avril 2014	

TA: Ambient temperature (20 to 25 °C)

LEGAL NOTES:

Information given in writing or verbally, in the context of our technical assistance and our trials, does not engage our responsibility. Information is given in good faith based on SICOMIN's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with SICOMIN's recommendations. We advise users of SICOMIN products to check by some practical trials that they are suitable for the intended processes and applications. The customer's storage, the use, the implementation and the transformation of the supplied products are not under SICOMIN's control and entirely under the sole responsibility of the user.

SICOMIN reserves the right to change the properties of its products. All technical data stated in this Product Data Sheet are based on laboratory tests. Actual measured data and tolerance may vary due to circumstances beyond our control.

If our responsibility should nevertheless be involved, it would be, for all the damages, limited to the value of the goods supplied by us and processed by the customer. We guaranty the non-reproachable quality of our products, in the general context of sales and delivery. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.